omega
www.platinet.eu
LIGHTING CATALOG 2017

TABLE OF CONTENTS

3. UNDERSTANDING LED WHITNESS TEMPERATURE
4. BEST QUALITY STANDARDS
5. IC DRIVER TECHNOLOGY
6. LED CONSTRUCTION
7-8. OMEGA LED TECHNICAL SPECIFICATION
9-28. ECO LED BULBS
29-26. WILD ANGLE BULBS
33-35. EXTENDED FUNCTION LED BULBS
36-40. LED SPOTLIGHT
41-50. LED DESK LAMPS
51. EXTENSION POWER CORDS

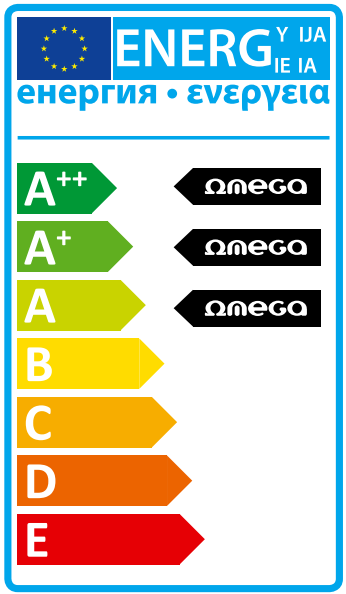

UNDERSTANDING LED WHITENESS TEMPERATURE

WE OFFER THE MOST POPULAR 3 TYPES OF LED WHITENESS COLORS:

2800K – warm white / **4200K** – neutral white / **6000K** – daylight – cool white

Kelvin Color Temperature	2700K	3000K	3500K	4100K	5000K	6500K
Associated Effects and Moods	Friendly Intimate Personal Exclusive	Calm Warm	Friendly Inviting Non-threatening	Neat Clean Efficient	Vibrant	Bright Alert Replicates -natural -sunlight
Appropriate Applications	Restaurant Hotel Lobbies Boutiques Retail stores	Libraries Office areas Homes	Public reception areas Showrooms Bookstrores Office areas	Office areas Conference rooms Classrooms Mass merchandisers Hospitals	Retail stores Office areas Factorie	Galleries Museums Jewelry stores Medical examination areas Printing companies

BEST QUALITY STANDARDS

All our products meets the standards of CE and implement very efficient IC driver technology.

IC
DRIVER

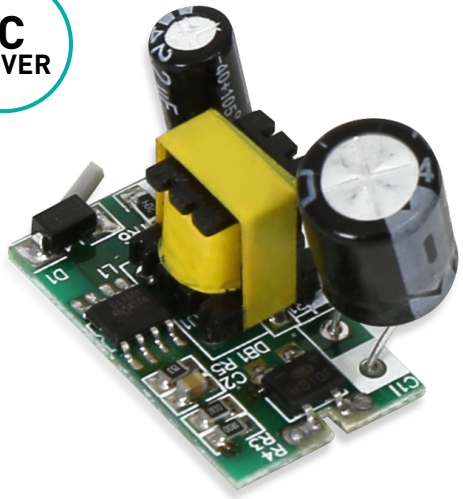

IC DRIVER TECHNOLOGY

IC DRIVER TECHNOLOGY guarantees that the products operate in the 100V-240V range. Resistant to voltage spikes and electrical interference. That means when a voltage change occurs the bulb will be stable, without flickering (strobe effect). Platinet's IC technology is more advanced that RC technology (see RC limitations below). The IC technology creates a higher quality light spectrum which is easier on the eyes for reading and other uses.

HOW TO CHECK LED'S DRIVER?

Point your smartphone camera on the LED and check if you see flickering (strobe effect).

If yes, LED Bulb has bad quality RC driver, like in the picture on the left.

Good quality LED driver causes no flickering (strobe effect), like in the picture on the right.

RC technology supports only voltage between 190-230V. Such leds have much shorter lifetime - up to the first major voltage spike. The main drawback is the flicker - strobe effect during voltage fluctuations, which can be seen when high power device is beeing turn on e.g. a vacuum cleaner, kettle, etc.

LED CONSTRUCTION

The housings of OMEGA LED bulbs are made of non-combustible material, resistant to high temperature. All our LEDs have an aluminum cooler which significantly reduces the operating temperature of the bulb - which, in combination with the highest quality 2835 SMD LEDs, driver IC - gives the effect of up to 30,000 working hours.

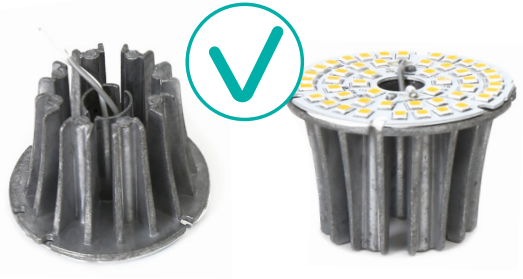

To effect the same cooling results B-brands are forced to use bigger bulb diameters. This solution results in the compatibility issues and more than 50% of the lamps on the market will not be compatible with bigger bulbs diameters.

OMEGA LED TECHNICAL SPECIFICATION

BASE TYPE	MODEL NO.	BODY TYPE	DRIVER TYPE	INPUT VOLTAGE	POWER	LED TYPE	LED QTY	LUMENS (lm)	CRI	BEAMING ANGLE(°)	AVAILABLE COLOR	PHOTO
E14	OMELE14EC-4W	C37	IC	AC100-240V	4W	SMD 2835	15	300	>80	160°	2800K	
	OMELE14A-3W	G45	IC	AC175-250V	3W	SMD 2835	5	270	>80	160°	2800K 4200K 6000K	
	OMELE14A-4W				4W		7	350				
	OMELE14A-5W				5W		8	440				
	OMELE14A-6W				6W		10	520				
	OMELE14C-3W	C38	IC	AC170-250V	3W	SMD 2835	5	270	>80	160°	2800K 4200K 6000K	
	OMELE14C-4W				4W		7	350				
	OMELE14C-5W				5W		8	440				
	OMELE14C-6W				6W		10	520				
	OMELE14-R50-5W	R50	IC	AC170-250V	5W	SMD 2835	8	400	>80	120°	2800K 4200K 6000K	

BASE TYPE	MODEL NO.	BODY TYPE	DRIVER TYPE	INPUT VOLTAGE	POWER	LED TYPE	LED QTY	LUMENS (lm)	CRI	BEAMING ANGLE(°)	AVAILABLE COLOR	PHOTO
E27	OMELE27A-3W	A50	IC	AC175V~250V	3W	SMD 2835	5	270	>80	160°	2800K 4200K 6000K	
	OMELE27W-6W	A55	IC	AC100V~240V	6W	SMD 2835	26	510	>80	300°	2800K 4200K 6000K	
	OMELE27W-9W	A60			9W		24	800				
	OMELE27W-12W	A65			12W		30	1050				
	OMELE27E-3W	A50	IC	AC100V~240V	3W	SMD 2835	5	240	>80	160°	2800K	
	OMELE27E-5W			AC175V~250V	5W		4	430	>80	160°	2800K 4200K 6000K	
	OMELE27E-7W	A60			7W		5	520				
	OMELE27E-9W				9W		12	750		200°		
	OMELE27E-12W				12W		14	1100		160°		
	OMELE27E-15W	A60	IC	AC160V~260V	15W	SMD 5730	30	1500	>80	240°	2800K 4200K 6000K	
	OMELE27E-18W	A60			18W		40	1800	>80	240°	2800K 4200K 6000K	
	OMELE27E-20W				20W		46	2000				
GU10	OMELGU10-4W	GU10	IC	AC100V~240V	4W	SMD 2835	12	240	>80	120°	2800K	
	OMELGU10-5W				5W		15	300			2800K 4200K 6000K	
	OMELGU10-6W				6W		20	400				
	OMELGU10-7W				7W		25	500				

ECO
LED
BULBS

LED BULB

Lifetime of 25000 hours
Efficient and Energy Saving

eco | **5W**

E14 BASE

COLOR LIGHT SCALE | **440lm** | 5W

ENERGY SAVING LED BULB

- **Power:** 5W
- **Input voltage:** AC170-250V 50/60Hz
- **Lumens:** 440
- **Beam angle:** 120°
- **Socket:** E14
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.4
- **LED type and qty:** 8PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 40W
- Do not use with dimmer
- Non-directional LED

INDOOR | **R50** | **E14**

ENERG
енергия ενεργεια
Y IJA
IE IA
A++
A+
A
B
C
D
E
A+

EAN	5907595431194	5907595431200	5907595431217
Model Code	OMELE14-R50-5W	OMELE14-R50-5W-42	OMELE14-R50-5W-60
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	50x98mm (width/height)		
Lumens	440lm		
Base	E14		
Voltage	AC 170-250V 50/60Hz		
Power	5W		



LED BULB

Lifetime of 25000 hours
Efficient and Energy Saving

eco

7W

E27 BASE

COLOR LIGHT SCALE

530lm
7W

ENERGY SAVING LED BULB

- **Power:** 7W
- **Input voltage:** AC170-250V 50/60Hz
- **Lumens:** 530
- **Beam angle:** 160°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.4
- **LED type and qty:** 10PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- Do not use with dimmer
- Non-directional LED

INDOOR

R63
E27

ENERG
енергия
ενεργεια
Y IJA
IE IA

EAN	590759543549	5907595435505	5907595435512
Model Code	**OMELE27-R63-7W**	**OMELE27-R63-7W-42**	**OMELE27-R63-7W-60**
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	63x108mm (width/height)		
Lumens	530lm		
Base	E27		
Voltage	AC 170-250V 50/60Hz		
Power	7W		



LED CANDLE BULB

Lifetime of 25000 hours
Energy Saving Lamp

eco

3W

E14 BASE

COLOR LIGHT SCALE

270lm
3W

ENERGY SAVING LED BULB

- **Power:** 3W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 270
- **Beam angle:** 160°
- **Socket:** E14
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 3PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 26W
- **Non-directional LED**
- **Current:** 30mA
- Do not use with dimmer

EQUIVALENT		
	Traditional Bulb	26W
	LED Bulb	3W 270lm

INDOOR

ENERG
енергия ενεργεια
Y IJA IE IA
A++
A+
A
B
C
D
E
A+

EAN	5907595429535	5907595429542	5907595429559
Model Code	OMELE14C-3W	OMELE14C-3W-4200	OMELE14C-3W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	37x99mm (width/height)		
Lumens	270lm		
Base	E14		
Voltage	AC175-250V 50/60HZ		
Power	3W		

LED CANDLE BULB

Lifetime of 25000 hours
Energy Saving Lamp

eco

4W

E14 BASE

COLOR LIGHT SCALE

350lm
4W

ENERGY SAVING LED BULB

- **Power:** 4W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 350
- **Beam angle:** 160°
- **Socket:** E14
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 4PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 32W
- **Non-directional LED**
- **Current:** 40mA
- Do not use with dimmer

EQUIVALENT		
	Traditional Bulb	32W
	LED Bulb	4W 350lm

INDOOR

ENERG
енергия
ενεργεια
Y IJA
IE IA
A++
A+
A
B
C
D
E
A+

EAN	5907595429566	5907595429573	5907595429580
Model Code	OMELE14C-4W	OMELE14C-4W-4200	OMELE14C-4W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	37x99mm (width/height)		
Lumens	350lm		
Base	E14		
Voltage	AC175-250V 50/60HZ		
Power	4W		

LED CANDLE BULB

Lifetime of 25000 hours
Energy Saving Lamp

eco

5W

E14 BASE

COLOR LIGHT SCALE

440lm
5W

ENERGY SAVING LED BULB

- **Power:** 5W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 440
- **Beam angle:** 160°
- **Socket:** E14
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 5PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 38W
- **Non-directional LED**
- **Current:** 45mA
- Do not use with dimmer

EQUIVALENT		
	Traditional Bulb	38W
	LED Bulb	5W 440lm

INDOOR

ENERG

енергия ενεργεια

Y IJA IE IA

A++ A+ A A B C D E

EAN	5907595429597	5907595429603	5907595429610
Model Code	OMELE14C-5W	OMELE14C-5W-4200	OMELE14C-5W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	37x199mm (width/height)		
Lumens	440lm		
Base	E14		
Voltage	AC175-250V 50/60HZ		
Power	5W		



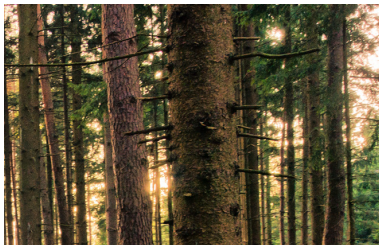

LED CANDLE BULB

Lifetime of 25000 hours
Energy Saving Lamp

eco

6W

E14 BASE

COLOR LIGHT SCALE

520lm
6W

ENERGY SAVING LED BULB

- **Power:** 6W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 520
- **Beam angle:** 160°
- **Socket:** E14
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 7PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 43W
- **Non-directional LED**
- **Current:** 50mA
- Do not use with dimmer

EQUIVALENT		
	Traditional Bulb	43W
	LED Bulb	6W 520lm

INDOOR

ENERG
енергия ενεργεια
Y IJA IE IA
A++
A+
A
B
C
D
E
A+

EAN	5907595433945	5907595433952	5907595433969
Model Code	OMELE14C-6W	OMELE14C-6W-4200	OMELE14C-6W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	37x99mm (width/height)		
Lumens	520lm		
Base	E14		
Voltage	AC175-250V 50/60HZ		
Power	6W		

LED CANDLE BULB

Lifetime of 25000 hours
Energy Saving Lamp

eco

7W

E14 BASE

COLOR LIGHT SCALE

720lm
7W

ENERGY SAVING LED BULB

- **Power:** 7W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 720
- **Beam angle:** 160°
- **Socket:** E14
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 14PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 55W
- **Non-directional LED**
- **Current:** 60mA
- Do not use with dimmer

EQUIVALENT		
	Traditional Bulb	55W
	LED Bulb	7W 720lm

INDOOR

ENERG
енергия ενεργεια
Y IJA IE IA
A++
A+
A
B
C
D
E
A+

EAN	5907595435345	5907595435352	5907595435369
Model Code	OMELE14C-7W	OMELE14C-7W-4200	OMELE14C-7W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	37x98mm (width/height)		
Lumens	720lm		
Base	E14		
Voltage	AC175-250V 50/60HZ		
Power	7W		

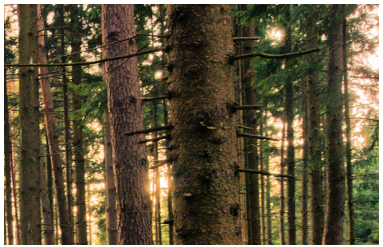

LED BULB

Lifetime of 25000 hours
Energy Saving Lamp

eco

3W

E14 BASE

COLOR LIGHT SCALE

270lm
3W

ENERGY SAVING LED BULB

- **Power:** 3W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 270
- **Beam angle:** 160°
- **Socket:** E14
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 3PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 26W
- **Non-directional LED**
- **Current:** 30mA
- Do not use with dimmer

EQUIVALENT		
	Traditional Bulb	26W
	LED Bulb	3W 270lm

INDOOR

ENERG

енергия ενεργεια

Y IJA IE IA

A++ A+ A A B C D E

EAN	5907595423731	5907595423748	5907595429481
Model Code	OMELE14A-3W	OMELE14A-3W-4200	OMELE14A-3W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	45x80mm (width/height)		
Lumens	270lm		
Base	E14		
Voltage	AC175-250V 50/60HZ		
Power	3W		



LED BULB

Lifetime of 25000 hours
Energy Saving Lamp

eco

4W

E14 BASE

COLOR LIGHT SCALE

350lm
4W

ENERGY SAVING LED BULB

- **Power:** 4W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 350
- **Beam angle:** 160°
- **Socket:** E14
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 4PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 32W
- **Non-directional LED**
- **Current:** 40mA
- Do not use with dimmer

EQUIVALENT		
	Traditional Bulb	32W
	LED Bulb	4W 350lm

INDOOR

ENERG

енергия ενεργεια

Y IJA IE IA

A++ A+ A B C D E

A+

EAN	5907595429832	5907595429498	5907595429504
Model Code	OMELE14A-4W	OMELE14A-4W-4200	OMELE14A-4W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	45x80mm (width/height)		
Lumens	350lm		
Base	E14		
Voltage	AC175-250V 50/60HZ		
Power	4W		

LED BULB

Lifetime of 25000 hours
Energy Saving Lamp

eco

5W

E14 BASE

COLOR LIGHT SCALE

440lm
5W

ENERGY SAVING LED BULB

- **Power:** 5W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 440
- **Beam angle:** 160°
- **Socket:** E14
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 5PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 38W
- **Non-directional LED**
- **Current:** 45mA
- Do not use with dimmer

EQUIVALENT		
	Traditional Bulb	38W
	LED Bulb	5W 440lm

INDOOR

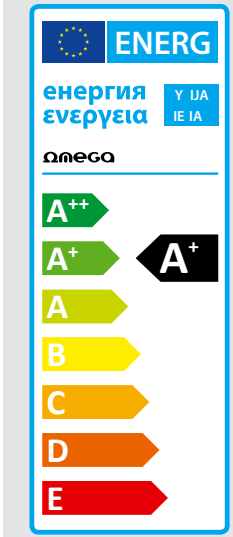

EAN	5907595432214	5907595432221	5907595432238
Model Code	OMELE14A-5W	OMELE14A-5W-4200	OMELE14A-5W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	45x80mm (width/height)		
Lumens	440lm		
Base	E14		
Voltage	AC175-250V 50/60HZ		
Power	5W		



LED BULB

Lifetime of 25000 hours
Energy Saving Lamp

eco | **6W**

E14 BASE

COLOR LIGHT SCALE

520lm 6W

ENERGY SAVING LED BULB

- **Power:** 6W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 520
- **Beam angle:** 160°
- **Socket:** E14
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 7PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 43W
- **Non-directional LED**
- **Current:** 50mA
- Do not use with dimmer

EQUIVALENT		
	Traditional Bulb	43W
	LED Bulb	6W 520lm

INDOOR

ENERG

енергия ενεργεια

Y IJA IE IA

A++ A+ A A B C D E

EAN	5907595433945	5907595433952	5907595433969
Model Code	OMELE14A-6W	OMELE14A-6W-4200	OMELE14A-6W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	45x80mm (width/height)		
Lumens	520lm		
Base	E14		
Voltage	AC175-250V 50/60HZ		
Power	6W		

LED BULB

Lifetime of 25000 hours
Energy Saving Lamp

eco | **7W**

E14 BASE

COLOR LIGHT SCALE | **720lm** | 7W

ENERGY SAVING LED BULB

- **Power:** 7W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 720
- **Beam angle:** 160°
- **Socket:** E14
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 14PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 55W
- **Non-directional LED**
- **Current:** 60mA
- Do not use with dimmer

EQUIVALENT		
	Traditional Bulb	43W
	LED Bulb	7W 720lm

INDOOR

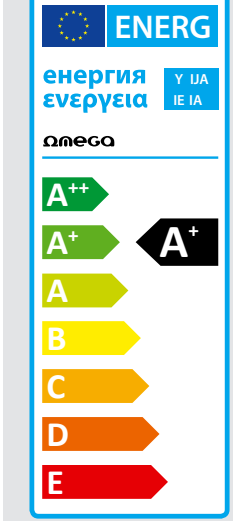

EAN	5907595435314	5907595435321	5907595435338
Model Code	OMELE14A-7W	OMELE14A-7W-4200	OMELE14A-7W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	45x80mm (width/height)		
Lumens	720lm		
Base	E14		
Voltage	AC175-250V 50/60HZ		
Power	7W		



LED BULB

Lifetime of 25000 hours
Efficient and Energy Saving

eco | **3W**

E27 BASE

COLOR LIGHT SCALE

270lm | 3W

ENERGY SAVING LED BULB

- **Power:** 3W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 270
- **Beam angle:** 160°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 3PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 26W
- **Non-directional LED**
- **Current:** 30mA
- Do not use with dimmer

EQUIVALENT		
	Traditional Bulb	26W
	LED Bulb	3W 270lm

INDOOR

ENERG
енергия ενεργεια
Y IJA IE IA
A++ A+ A A B C D E A+

EAN	5907595429825	5907595429511	5907595429528
Model Code	OMELE27A-3W	OMELE27A-3W-4200	OMELE27A-3W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	45x75mm (width/height)		
Lumens	270lm		
Base	E27		
Voltage	AC175-250V 50/60HZ		
Power	3W		

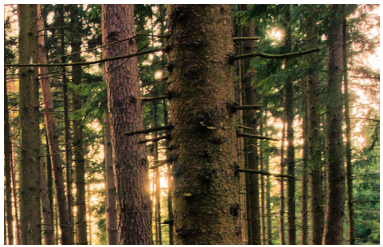

LED BULB

Lifetime of 25000 hours
Energy Saving Lamp

eco

6W

E27 BASE

COLOR LIGHT SCALE

520lm
6W

ENERGY SAVING LED BULB

- **Power:** 6W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 520
- **Beam angle:** 160°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 10PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 43W
- **Non-directional LED**
- **Current:** 55mA
- Do not use with dimmer

EQUIVALENT		
	Traditional Bulb	43W
	LED Bulb	6W 520lm

INDOOR

ENERG

енергия ενεργεια

Y IJA IE IA

A++ A+ A B C D E

EAN	5907595435581	5907595435598	5907595435604
Model Code	OMELE27C-6W	OMELE27C-6W-4200	OMELE27C-6W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	45x80mm (width/height)		
Lumens	520lm		
Base	E27		
Voltage	AC175-250V 50/60HZ		
Power	6W		

LED BULB

Lifetime of 30000 hours
Efficient and Energy Saving

eco | **3W**

E27 BASE

WARM WHITE | **240lm** | 3W

ENERGY SAVING LED BULB

- **Power:** 3W
- **Color temperature:** 2800K Warm White
- **Input voltage:** AC100-240V 50/60Hz
- **Lumens:** 240
- **Beam angle:** 160°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -20-+45°C
- **Power factor:** >0.5
- **LED type and qty:** 6PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 30 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 25W
- Do not use with dimmer
- Non-directional LED

EQUIVALENT		
	Traditional Bulb	25W
	LED Bulb	3W 240lm

INDOOR

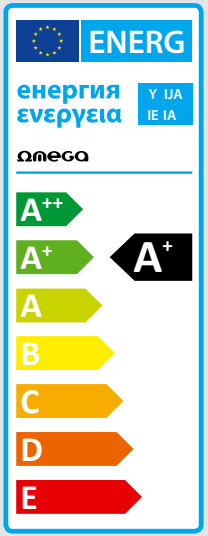

EAN	5907595423755
Model Code	OMELE27E-3W
Color temp.	warm white 2800K
Dimentions	50x100mm (width/height)
Luminous	240lm
Base	E27
Voltage	AC 100-240V 50/60Hz
Power	3W

LED BULB

Lifetime of 30000 hours
Efficient and Energy Saving

eco

5W

E27 BASE

COLOR LIGHT SCALE

430lm
5W

ENERGY SAVING LED BULB

- **Power:** 5W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 430
- **Beam angle:** 160°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 4PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 30 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 37W
- Do not use with dimmer
- Non-directional LED

EQUIVALENT		
	Traditional Bulb	37W
	LED Bulb	5W 430lm

INDOOR

ENERG
енергия ενεργεια
Y IJA IE IA
A++
A+
A
B
C
D
E

EAN	5907595423557	5907595426565	5907595426572
Model Code	**OMELE27E-5W**	**OMELE27E-5W-4200**	**OMELE27E-5W-6000**
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	60x108mm (width/height)		
Lumens	430lm		
Base	E27		
Voltage	AC 175-250V 50/60Hz		
Power	5W		

LED BULB

Lifetime of 30000 hours
Efficient and Energy Saving

eco

7W

E27 BASE

COLOR LIGHT SCALE

520lm
7W

ENERGY SAVING LED BULB

- **Power:** 7W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 520
- **Beam angle:** 160°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -20-+45°C
- **Power factor:** >0.5
- **LED type and qty:** 5PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 30 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 43W
- Do not use with dimmer
- Non-directional LED

EQUIVALENT		
	Traditional Bulb	43W
	LED Bulb	7W 520lm

INDOOR

ENERG

енергия ενεργεια

Y IJA IE IA

A++ A+ A B C D E

EAN	5907595423595	5907595426398	5907595426404
Model Code	OMELE27E-7W	OMELE27E-7W-4200	OMELE27E-7W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	60x108mm (width/height)		
Lumens	520lm		
Base	E27		
Voltage	AC 175-250V 50/60Hz		
Power	7W		

LED BULB

Lifetime of 30000 hours
Efficient and Energy Saving

eco

9W

E27 BASE

COLOR LIGHT SCALE

750lm
9W

ENERGY SAVING LED BULB

- **Power:** 9W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 750
- **Beam angle:** 200°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -20-+45°C
- **Power factor:** >0.5
- **LED type and qty:** 12PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 30 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 57W
- Do not use with dimmer
- Non-directional LED

EQUIVALENT		
	Traditional Bulb	57W
	LED Bulb	9W 750lm

INDOOR

ENERG
енергия ενεργεια
Y IJA IE IA
A++
A+
A
B
C
D
E
A+

EAN	5907595423601	5907595426411	5907595426428
Model Code	OMELE27E-9W	OMELE27E-9W-4200	OMELE27E-9W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	60x108mm (width/height)		
Lumens	750lm		
Base	E27		
Voltage	AC 175-250V 50/60Hz		
Power	9W		



LED BULB

Lifetime of 30000 hours
Efficient and Energy Saving

eco

12W

E27 BASE

COLOR LIGHT SCALE

1100lm
12W

ENERGY SAVING LED BULB

- **Power:** 12W
- **Input voltage:** AC175-250V 50/60Hz
- **Lumens:** 1100
- **Beam angle:** 160°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 14PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 30 000 h
- **Switch on/off times:** 15 000
- **Incandescent bulb equivalent:** 77W
- Do not use with dimmer
- Non-directional LED

EQUIVALENT		
	Traditional Bulb	77W
	LED Bulb	12W 1100lm

INDOOR

ENERG

енергия ενεργεια

Y IJA
IE IA

A++
A+
A
B
C
D
E

A+

EAN	5907595423564	5907595425803	5907595425810
Model Code	OMELE27E-12W	OMELE27E-12W-4200	OMELE27E-12W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	60x108mm (width/height)		
Lumens	1100lm		
Base	E27		
Voltage	AC 175-250V 50/60Hz		
Power	12W		



LED BULB

Lifetime of 30000 hours
Efficient and Energy Saving

eco

15W

E27 BASE

COLOR LIGHT SCALE

1500lm
15W

ENERGY SAVING LED BULB

- **Power:** 15W
- **Input voltage:** AC160-260V 50/60Hz
- **Lumens:** 1500
- **Beam angle:** 240°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 30PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 30 000 h
- **Switch on/off times:**50 000
- **Incandescent bulb equivalent:** 99W
- Do not use with dimmer
- Non-directional LED

EQUIVALENT		
	Traditional Bulb	99W
	LED Bulb	12W 1500lm

INDOOR

ENERG

енергия ενεργεια

Y IJA IE IA

A++ A+ A B C D E

EAN	5907595423571	5907595425827	5907595425834
Model Code	OMELE27E-15W	OMELE27E-15W-4200	OMELE27E-15W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	60x108mm (width/height)		
Lumens	1500lm		
Base	E27		
Voltage	AC 160-260V 50/60Hz		
Power	15W		



LED BULB

Lifetime of 30000 hours
Efficient and Energy Saving

eco | **18W**

E27 BASE

COLOR LIGHT SCALE

1800lm | 18W

ENERGY SAVING LED BULB

- **Power:** 18W
- **Input voltage:** AC160-260V 50/60Hz
- **Lumens:** 1800
- **Beam angle:** 240°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 40PCS SMD2835
- **Starting time:** <0.1 S
- **Life time of the product:** 30 000 h
- **Switch on/off times:** 50 000
- **Incandescent bulb equivalent:** 115W
- Do not use with dimmer
- Non-directional LED

EQUIVALENT		
	Traditional Bulb	115W
	LED Bulb	18W 1800lm

INDOOR

ENERG
енергия ενεργεια
Y IJA IE IA
A++ A+ A B C D E

EAN	5907595433600	5907595433617	5907595433624
Model Code	**OMELE27E-18W**	**OMELE27E-18W-4200**	**OMELE27E-18W-6000**
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	60x118mm (width/height)		
Lumens	1800lm		
Base	E27		
Voltage	AC 160-260V 50/60Hz		
Power	18W		

LED BULB

Lifetime of 30000 hours
Efficient and Energy Saving

eco

20W

E27 BASE

COLOR LIGHT SCALE

2000lm
20W

ENERGY SAVING LED BULB

- **Power:** 20W
- **Input voltage:** AC160-260V 50/60Hz
- **Lumens:** 2000
- **Beam angle:** 240°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 46PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 30 000 h
- **Switch on/off times:** 50 000
- **Incandescent bulb equivalent:** 126W
- Do not use with dimmer
- Non-directional LED

EQUIVALENT		
	Traditional Bulb	126W
	LED Bulb	20W 2000lm

INDOOR

ENERG

енергия ενεργεια

Y IJA IE IA

A++ A+ A B C D E

EAN	5907595433631	5907595433648	5907595433655
Model Code	OMELE27E-20W	OMELE27E-20W-4200	OMELE27E-20W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	70x124mm (width/height)		
Lumens	2000lm		
Base	E27		
Voltage	AC 160-260V 50/60Hz		
Power	20W		

WILD
ANGLE
NEW
PARAMETERS

WIDE ANGLE

LED BULB

Lifetime of 25000 hours
Beam angle 300°

wild angle | **6W**

300° ANGLE

E27 BASE

COLOR LIGHT SCALE | **510lm** 6W

Internal structure

ENERGY SAVING LED BULB

- **Power:** 6W
- **Input voltage:** AC100-240V 50/60Hz
- **Lumens:** 510
- **Beam angle:** 300°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -25-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 26PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 30 000
- **Incandescent bulb equivalent:** 42W
- **Current:** 60mA
- Do not use with dimmer

INDOOR

EQUIVALENT		
	Traditional Bulb	42W
	LED Bulb	6W 510lm

300° ANGLE

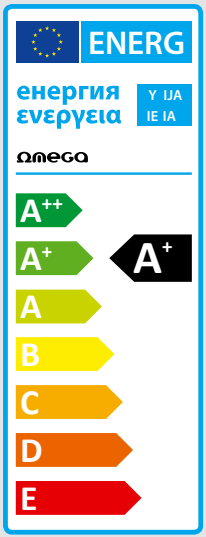

EAN	5907595430227	5907595430234	5907595430241
Model Code	OMELE27W-6W	OMELE27W-6W-4200	OMELE27W-6W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	55x101mm (width/height)		
Lumens	510lm		
Base	E27		
Voltage	AC100-240V 50/60HZ		
Power	6W		

WIDE ANGLE

LED BULB

Lifetime of 25000 hours
Beam angle 300°

wild angle | **9W**

300° ANGLE

E27 BASE

COLOR LIGHT SCALE | **800lm** 9W

ENERGY SAVING LED BULB

- **Power:** 9W
- **Input voltage:** AC100-270V 50/60Hz
- **Lumens:** 800
- **Beam angle:** 300°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -25-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 24PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 30 000
- **Incandescent bulb equivalent:** 60W
- **Current:** 105mA
- Do not use with dimmer

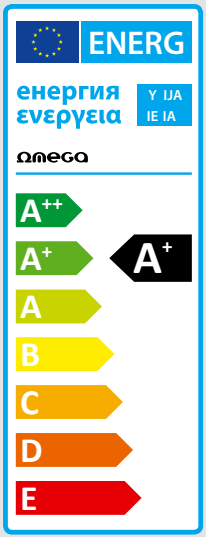

EAN	5907595430258	5907595430265	5907595430272
Model Code	OMELE27W-9W	OMELE27W-9W-4200	OMELE27W-9W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	110x60mm (width/height)		
Lumens	800lm		
Base	E27		
Voltage	AC100-240V 50/60HZ		
Power	9W		

WIDE ANGLE

LED BULB

Lifetime of 25000 hours
Beam angle 300°

wild angle | **12W**

300° ANGLE

E27 BASE

COLOR LIGHT SCALE | **1050lm** 12W

ENERGY SAVING LED BULB

- **Power:** 12W
- **Input voltage:** AC100-240V 50/60Hz
- **Lumens:** 1050
- **Beam angle:** 300°
- **Socket:** E27
- **CRI:** >80
- **Working temperature:** -25-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 30PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 30 000
- **Incandescent bulb equivalent:** 75W
- **Current:** 150mA
- Do not use with dimmer

INDOOR

EQUIVALENT		
	Traditional Bulb	75W
	LED Bulb	12W 1050lm

300° ANGLE

ENERG

енергия ενεργεια

Y IJA IE IA

A++ A+ A B C D E

EAN	5907595430289	5907595430296	5907595430302
Model Code	OMELE27W-12W	OMELE27W-12W-4200	OMELE27W-12W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	123x65mm (width/height)		
Lumens	1050lm		
Base	E27		
Voltage	AC100-240V 50/60HZ		
Power	12W		

EXTENDED FUNCTION LED BULBS

LED RECHARGEABLE WITH BUILD-IN BATTERY

BULB

Lifetime of 25000 hours
Efficient and Energy Saving

ext | **4W**

E27 BASE

WARM WHITE | 280lm | 4W

RECHARGEABLE LED BULB
Perfect for emergency lighting uses.

FEATURES
- **Color temperature:** Warm White 2700K
- **Remote control:** light intensity regulation
- **Input Voltage** AC85~265V, 50~60Hz
- **Built-in battery:** 2200mA lithium
- **Dimension:** 73-107mm
- **Lumens:** 280
- **Lifetime:** 25000h
- **Beam angle:** 120
- **Power:** 4W
- **Base:** E27

MANUAL
- Plug the bulb into the socket.
- To charge the battery, move the switch to the AC setting. When the red light turns green, battery is fully charged. You can switch off charging mode by pressing the button to the OFF setting.
- When power is cut off, turn on the bulb by moving the button to the DC setting.
- Use the bulb as a flashlight.
- You can regulate light intensity by remote control.

INDOOR

Up to 6 Hours Flashlight

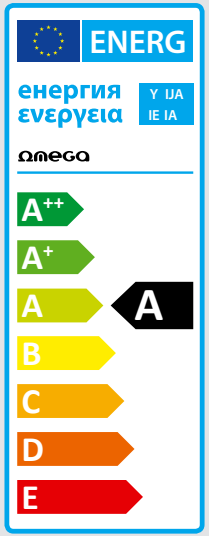

EAN	5907595420723
Model Code	OMRLE27-4W
Color temp.	warm white 2700K
Dimentions	73x107mm (width/height)
Luminous	280lm
Base	E27
Voltage	AC 85-265V 50/60Hz
Power	4W







MOTION SENSOR LED
BULB

Lifetime of 50000 hours
Efficient and Energy Saving

ext | **6W**

E27 BASE

WARM WHITE | 450lm | 6W

MOTION SENSOR LED BULB

FEATURES
- **Color temperature:** Warm White 2700K
- **Material:** aluminum body + PC cover
- **Input Voltage:** AC85~265V, 50~60Hz
- **Dimension:** 60x118mm
- **Lumens:** 450
- **Lifetime**: 50000h
- **Beam angle:** 120°
- **Base:** E27
- **Power** 6W

After 2 min. without motion detected, bulb will automatically switch off.



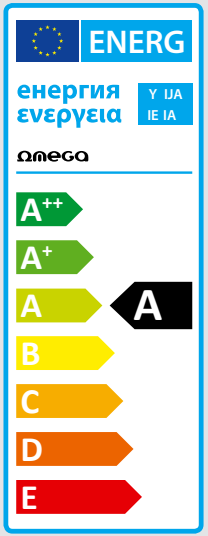

EAN	5907595420716
Model Code	OMMLE27-6W
Color temp.	warm white 2700K
Dimentions	60x118mm (width/height)
Luminous	450lm
Base	E27
Voltage	AC 85-265V 50/60Hz
Power	6W

LED SPOTLIGHT

LED SPOTLIGHT

Lifetime of 30000 hours
Efficient and Energy Saving

spot | **4W**

GU10 BASE

WARM WHITE

240lm
4W

ENERGY SAVING LED SPOTLIGHT

- **Power:** 4W
- **Input voltage:** AC100-240 50/60Hz
- **Lumens:** 240
- **Beam angle:** 120°
- **Socket:** GU10
- **CRI:** >80
- **Working temperature:** -20-+45°C
- **Power factor:** >0.5
- **LED type and qty:** 15PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 30 000 h
- **Switch on/off times:** 15 000
- **Current:** 30mA
- Do not use with dimmer

INDOOR

ENERG
енергия
ενεργεια
Y IJA
IE IA
A++
A+
A
B
C
D
E

EAN	5907595429023	5907595430319	5907595430326
Model Code	OMELGU10-4W	OMELGU10-4W-4200	OMELGU10-4W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	50x57mm (width/height)		
Lumens	240lm		
Base	GU10		
Voltage	AC 100-240V 50/60Hz		
Power	4W		

LED SPOTLIGHT

Lifetime of 30000 hours
Efficient and Energy Saving

spot | **5W**

GU10 BASE

COLOR LIGHT SCALE

300lm | **5W**

ENERGY SAVING LED SPOTLIGHT

- **Power:** 5W
- **Input voltage:** AC175-250 50/60Hz
- **Lumens:** 380
- **Beam angle:** 120°
- **Socket:** GU10
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 7PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 30 000 h
- **Switch on/off times:** 15 000
- **Current:** 45mA
- Do not use with dimmer

INDOOR

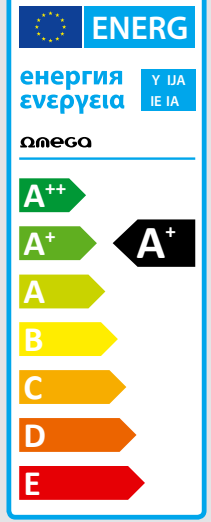

EAN	5907595425544	5907595427944	5907595427975
Model Code	OMELGU10-5W	OMELGU10-5W-4200	OMELGU10-5W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	50x55mm (width/height)		
Lumens	380lm		
Base	GU10		
Voltage	AC 175-250V 50/60Hz		
Power	5W		

LED SPOTLIGHT

Lifetime of 30000 hours
Efficient and Energy Saving

spot | **6W**

GU10 BASE

COLOR LIGHT SCALE

400lm
6W

ENERGY SAVING LED SPOTLIGHT

- **Power:** 6W
- **Input voltage:** AC100-240 50/60Hz
- **Lumens:** 400
- **Beam angle:** 120°
- **Socket:** GU10
- **CRI:** >80
- **Working temperature:** -20-+45°C
- **Power factor:** >0.5
- **LED type and qty:** 25PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 30 000 h
- **Switch on/off times:** 15 000
- **Curent:** 41mA
- Do not use with dimmer

INDOOR

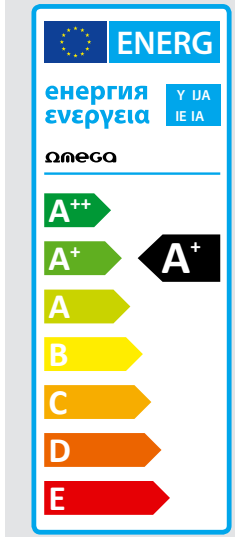

EAN	5907595425551	5907595427951	5907595427982
Model Code	OMELGU10-6W	OMELGU10-6W-4200	OMELGU10-6W-6000
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	50x57mm (width/height)		
Lumens	400lm		
Base	GU10		
Voltage	AC 100-240V 50/60Hz		
Power	6W		

LED SPOTLIGHT

Lifetime of 30000 hours
Efficient and Energy Saving

spot | **7W**

GU10 BASE

COLOR LIGHT SCALE

620lm
7W

ENERGY SAVING LED SPOTLIGHT

- **Power:** 7W
- **Input voltage:** AC175-250 50/60Hz
- **Lumens:** 620
- **Beam angle:** 100°
- **Socket:** GU10
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 12PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Curent:** 45mA
- Do not use with dimmer

INDOOR

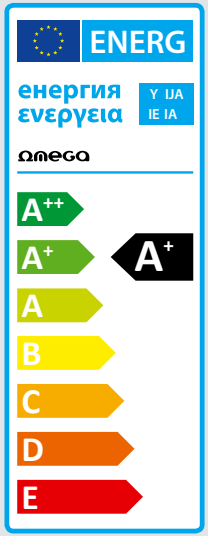

EAN	5907595425568	5907595427968	5907595427999
Model Code	**OMELGU10-7W**	**OMELGU10-7W-4200**	**OMELGU10-7W-6000**
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	50x55mm (width/height)		
Lumens	620lm		
Base	GU10		
Voltage	AC 175-250V 50/60Hz		
Power	7W		

LED SPOTLIGHT

Lifetime of 30000 hours
Efficient and Energy Saving

spot | **8W**

GU10 BASE

COLOR LIGHT SCALE

810lm
8W

ENERGY SAVING LED SPOTLIGHT

- **Power:** 8W
- **Input voltage:** AC175-250 50/60Hz
- **Lumens:** 810
- **Beam angle:** 100°
- **Socket:** GU10
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 12PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Curent:** 66mA
- Do not use with dimmer

INDOOR

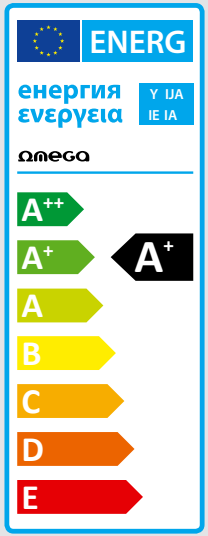

EAN	5907595435437	5907595435444	5907595435451
Model Code	**OMELGU10-8W**	**OMELGU10-8W-4200**	**OMELGU10-8W-6000**
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	50x55mm (width/height)		
Lumens	810lm		
Base	GU10		
Voltage	AC 100-240V 50/60Hz		
Power	8W		

LED SPOTLIGHT

Lifetime of 30000 hours
Efficient and Energy Saving

spot | **9W**

GU10 BASE

COLOR LIGHT SCALE

920lm
9W

ENERGY SAVING LED SPOTLIGHT

- **Power:** 9W
- **Input voltage:** AC175-250 50/60Hz
- **Lumens:** 920
- **Beam angle:** 100°
- **Socket:** GU10
- **CRI:** >80
- **Working temperature:** -10-+40°C
- **Power factor:** >0.5
- **LED type and qty:** 14PCS SMD2835
- **Starting time:** <0.5 S
- **Life time of the product:** 25 000 h
- **Switch on/off times:** 15 000
- **Curent:** 70mA
- Do not use with dimmer

INDOOR

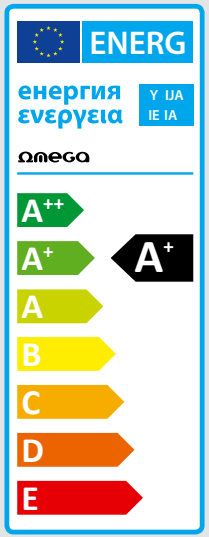

EAN	5907595435468	5907595435475	5907595435482
Model Code	**OMELGU10-9W**	**OMELGU10-9W-4200**	**OMELGU10-9W-6000**
Color temp.	warm white 2800K	neutral white 4200K	cool white 6000K
Dimentions	50x55mm (width/height)		
Lumens	920lm		
Base	GU10		
Voltage	AC 175-250V 50/60Hz		
Power	9W		

LED TUBE BULBS

NEWEST PRODUCTS

LED

TUBE BULB

Lifetime of 25000 hours
Efficient and Energy Saving

tube | **10W** | **60cm**

G13 BASE

COLOR LIGHT SCALE

1000lm
10W



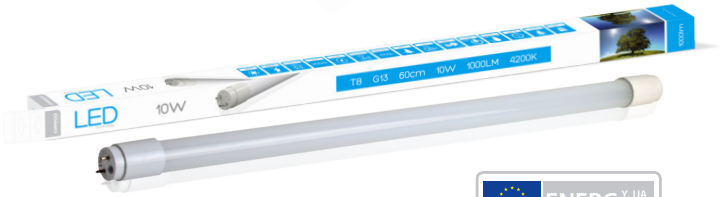



G13	
<0,1s	
25000h	
10W POWER	
PF >0,5 POWER FACTOR	
60mA	
>80 Ra CRI	
INDOOR	
-20°C +40°C TEMPERATURE RANGE	
270° ANGLE	
ON OFF x15000	
4200K 6000K COLOR TEMPERATURE	
44 LED SMD (2835) LED QUANTITY	
AC 175-250V 50/60HZ	
1000lm	
<0,1s	

EAN	5907595431484
Model Code	OMELEG13T8-10W
Color temp.	neutral white 4200K

EAN	5907595433662
Model Code	OMELEG13T8-10W-6000
Color temp.	cold white 6000K

LED

TUBE BULB

Lifetime of 25000 hours
Efficient and Energy Saving

tube | **18W** | **120cm**

G13 BASE

COLOR LIGHT SCALE

1800lm 18W



G13	<0,1s	25000h	18W POWER	PF >0,5 POWER FACTOR	85mA	>80 Ra CRI	INDOOR	
-20°C +40°C TEMPERATURE RANGE	270° ANGLE	ON OFF x15000	4200K 6000K COLOR TEMPERATURE	66 LED SMD (2835) LED QUANTITY	AC 175-250V 50/60HZ	1800lm	<0,1s	

EAN	5907595431491
Model Code	OMELEG13T8-18W
Color temp.	neutral white 4200K

EAN	5907595433679
Model Code	OMELEG13T8-18W-6000
Color temp.	cold white 6000K



Ωmega

Decor Edition

Vintage Filament Bulb

Decor Edition

LED

Vintage Filament Bulb



E14 BASE

WARM WHITE 2800K

440lm
4W

4W



E14	<0,5s	25000h	4W POWER	PF >0,5 POWER FACTOR	35mA	>80 Ra CRI	45mm 78mm 26g		
-10°C +40°C TEMPERATURE RANGE	360° ANGLE	ON OFF x15000	2800K COLOR TEMPERATURE	LED COB LED TYPE	AC 175-250V 50/60HZ	440lm	ON <0,5s	INDOOR	

EAN	5907595435536
Model Code	OMELE14F-4W
Color temp.	warm white 2800K

Decor Edition

LED

Vintage Filament Bulb



E14 BASE

WARM WHITE 2800K

440lm
4W

4W



E14	<0,5s	25000h	4W POWER	PF >0,5 POWER FACTOR	35mA	>80 Ra CRI	35mm 96mm 26g
-10°C +40°C TEMPERATURE RANGE	360° ANGLE	ON OFF x15000	2800K COLOR TEMPERATURE	LED COB LED TYPE	AC 175-250V 50/60HZ	440lm	ON <0,5s
INDOOR							

EAN	5907595435529
Model Code	OMELE14FC-4W
Color temp.	warm white 2800K

Decor Edition

LED

Vintage Filament Bulb



E27 BASE

WARM WHITE 2800K

240lm
2W

2W



E27	<0,5s	25000h	2W POWER	PF >0,5 POWER FACTOR	26mA	>80 Ra CRI	45mm 72mm 26g		
-10°C +40°C TEMPERATURE RANGE	360° ANGLE	ON OFF x15000	2800K COLOR TEMPERATURE	LED COB LED TYPE	AC 175-250V 50/60HZ	240lm	ON <0,5s	INDOOR	

EAN	5907595435543
Model Code	OMELE27F-2W
Color temp.	warm white 2800K

Decor Edition

LED

Vintage Filament Bulb



E27 BASE

WARM WHITE 2800K

440lm
4W

4W



E27	<0,5s	25000h	4W POWER	PF >0,5 POWER FACTOR	35mA	>80 Ra CRI	60mm, 108mm, 36g
-10°C +40°C TEMPERATURE RANGE	360° ANGLE	ON OFF x15000	2800K COLOR TEMPERATURE	LED COB LED TYPE	AC 175-250V 50/60HZ	440lm	ON <0,5s
INDOOR							

EAN	5907595435550
Model Code	OMELE27F-4W
Color temp.	warm white 2800K

Decor Edition

LED

Vintage Filament Bulb



E27 BASE

650lm 6W

6W



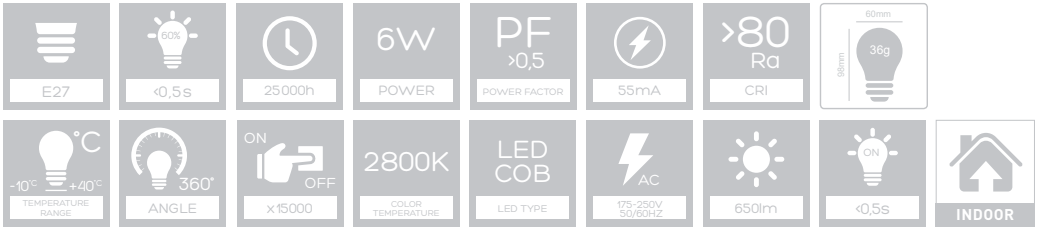

EAN	5907595435567
Model Code	OMELE27F-6W
Color temp.	warm white 2800K

ΩmeGa

Decor Edition

LED

Vintage Filament Bulb



E27 BASE

WARM WHITE 2800K

440lm
4W

4W

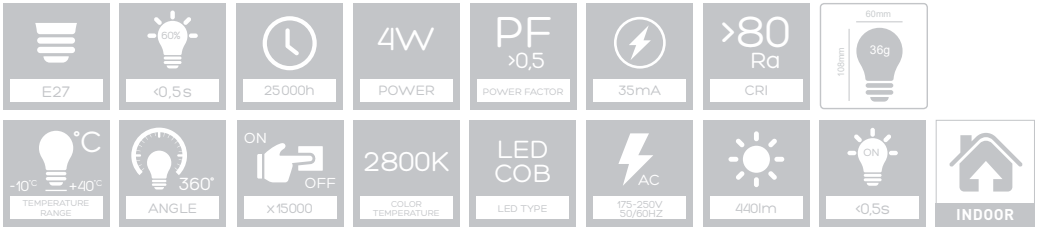

EAN	5907595435574
Model Code	OMELE27FG-4W
Color temp.	warm white 2800K

EXTENSION POWER CORDS

+switch

OL5F15 / 1.5 meters black
OL5F3 / 3 meters black
OL5F5 / 5 meters black

OL5F15 / 1.5 meters white
OL5F3 / 3 meters white

+switch

FL5F15 / 1.5 meters black
FL5F3 / 3 meters black
FL5F5 / 5 meters black

FL5F15W / 1.5 meters white
FL5F3W / 3 meters white

+switch

OL5G18 / 1.8 meters black
OL5G3 / 3 meters black

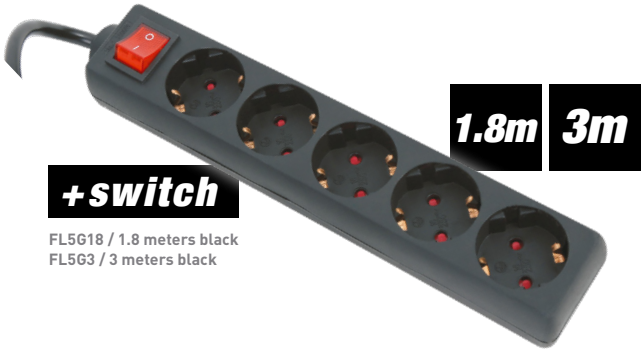

+switch

FL5G18 / 1.8 meters black
FL5G3 / 3 meters black

ASK PLATINET'S TRADER FOR LED DISPLAYS AND OTHER MARKETING SUPPORT.

Scan me to download full lighting offer

www.platinet.eu

Distributor:

PLATINET S.A.
Sliwiaka 48 St.,
30-798 Krakow, PL

tel. +48 12 65 10 580
export@platinet.eu

OFFICIAL DISTRIBUTOR STAMP